



COUNTY OF GLENN

Department of General Services- Facilities
453 E. County Road 49 1/2
Willows, CA 95988
Phone: 530-934-6545
Facilities2@countyofglenn.net
www.countyofglenn.net

SCOTT H. DEMOSS
County Administrative Officer
525 W. Sycamore St. Suite B1
Willows, CA 95988
Phone: 530-934-6400
Fax: 530-934-6419
gcboard@countyofglenn.net

REQUEST FOR INFORMATION (RFI)

Solicitation Description: Jane Hahn Building ADA Improvements

Solicitation Opening Date, Time: Friday, April 14, 2023 at 10:00 a.m.

Location: General Services
453 E. County Road 49 1/2
Willows, CA 95988

RFI Number: 001


RFI Date: Friday, April 7, 2023

Contact: Joe Bettencourt, Supervising Staff Services Analyst- General Services
Ricardo Valdez, Facilities Operation Manager- General Services
Facilities2@countyofglenn.net, (530) 934-6545

Return one properly executed copy of this RFI with bid response or prior to the Bid Opening Date/Time listed above.

1. **Question:** The Mechanical Plans M1 shows new vent through roof system for the new restroom exhaust fans, can the contractor use existing vent through roof system for new exhaust fans?
1. **Response:** Yes, the contractor can connect new restroom exhaust fans to existing vent through roof system.
2. **Question:** Can the contractor use areas inside the building for staging/storage?
2. **Response:** The open bay area and open area outside of the immediate area can be used for staging/storage. Areas are outlined in Attachment 1 to this document.
3. **Question:** Is there attic access?
3. **Response:** Yes
4. **Question:** Is there and Engineers Estimate?
4. **Response:** No
5. **Question:** Is the contractor responsible for relocation of panels/controls (thermostats, alarms, controls) located on the south east wall of the open office?
5. **Response:** No, contractor will be responsible for re-locating existing light switches and outlets to meet requirements of the Plans and Specifications. Other panels/controls will be relocated by others.
6. **Question:** Where will electrical wires terminate for card access readers?
6. **Response:** in the room to the east of the lobby, per Plans E2.2

7. **Question:** Casework to be removed on west wall of expanded lobby, is there anything inside the chase above casework and is this to be demolished or remain in place?
7. **Response:** There is nothing in the chase above the case work, this it to be demolished and finished in accordance with plans and specifications. See pictures of chase as Attachment 2 to this document.

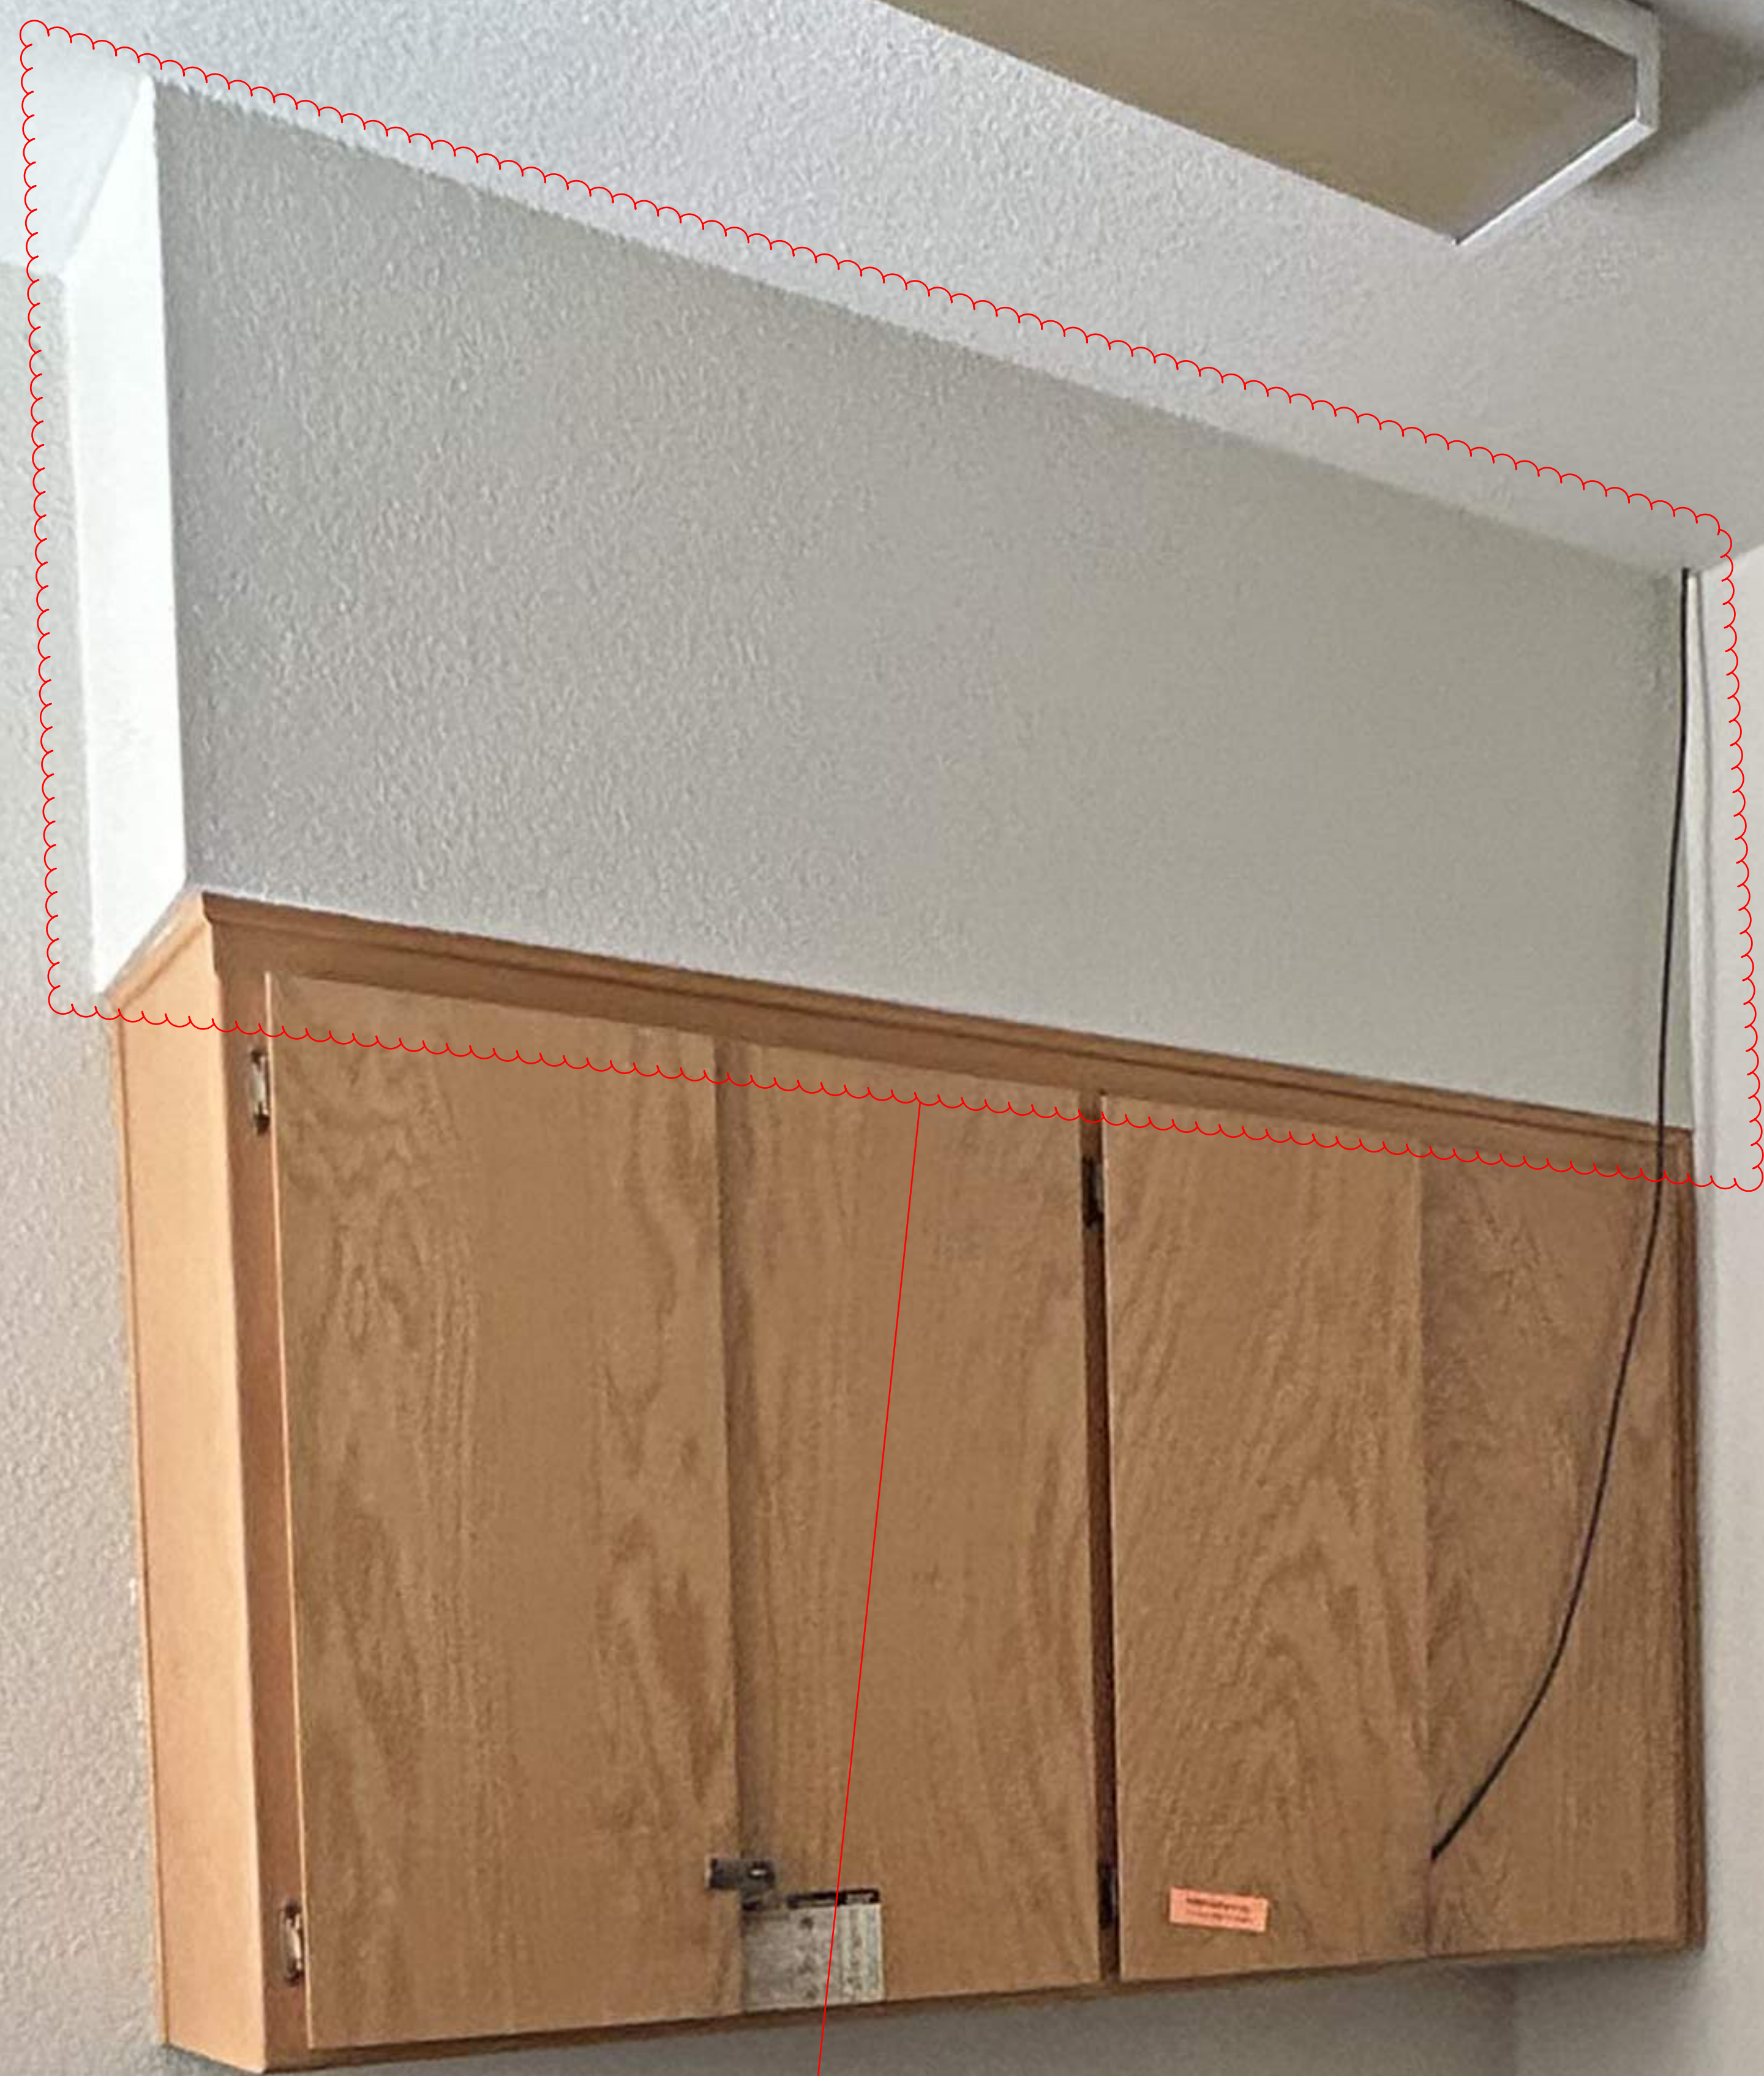

Wall casework to be removed per plan. What is inside this chase? Will this chase be demo'd or remain?



