



**SECTION**  
**ROLLED CURB &**  
**GUTTER**

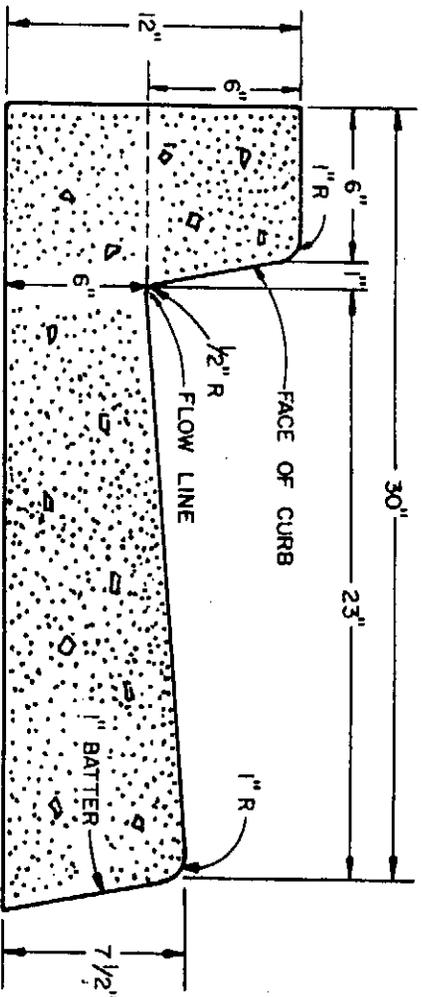

**SECTION**  
**VERTICAL CURB**  
**& GUTTER**

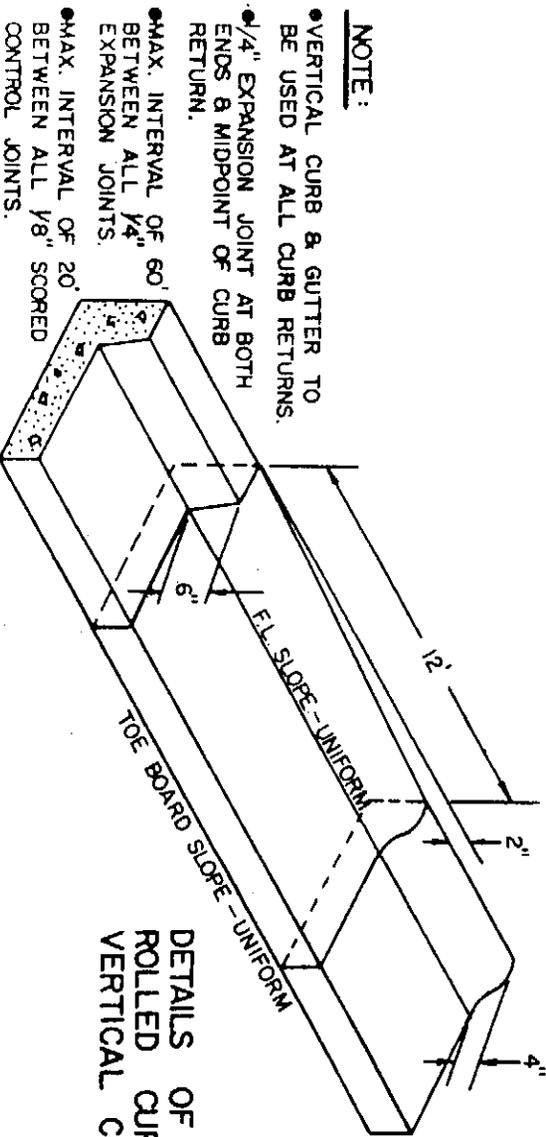

- NOTE:**
- VERTICAL CURB & GUTTER TO BE USED AT ALL CURB RETURNS.
  - 1/4" EXPANSION JOINT AT BOTH ENDS & MIDPOINT OF CURB RETURN.
  - MAX. INTERVAL OF 60' BETWEEN ALL 1/4" EXPANSION JOINTS.
  - MAX. INTERVAL OF 20' BETWEEN ALL 1/8" SCORED CONTROL JOINTS.

DETAILS OF TRANSITION FROM  
 ROLLED CURB & GUTTER TO  
 VERTICAL CURB & GUTTER

COUNTY OF GLENN — SUBDIVISION STANDARDS

STANDARD CURB & GUTTER (NO SCALE)

REV. DATE	DWG. NO.
	S-2